



LED Dance Floor



High Definition



Light & Thin



Strong Load-bearing



Interactive




Easy Maintenance



Full perspective






GOB protection




High flatness



Cabinet Size

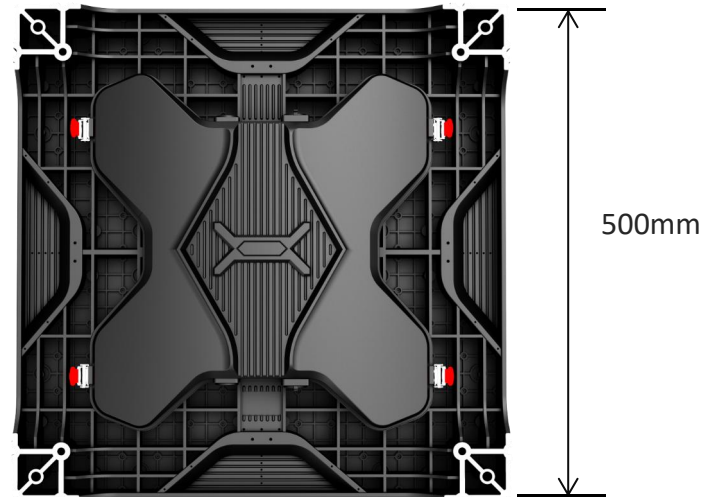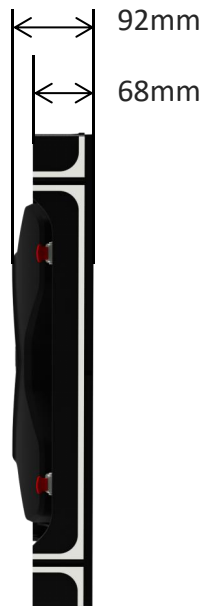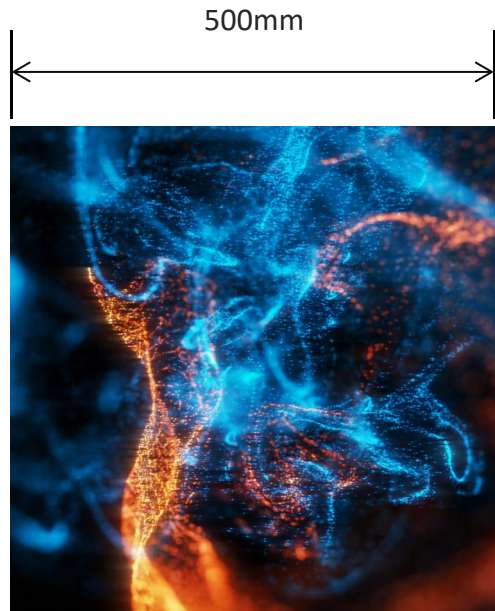

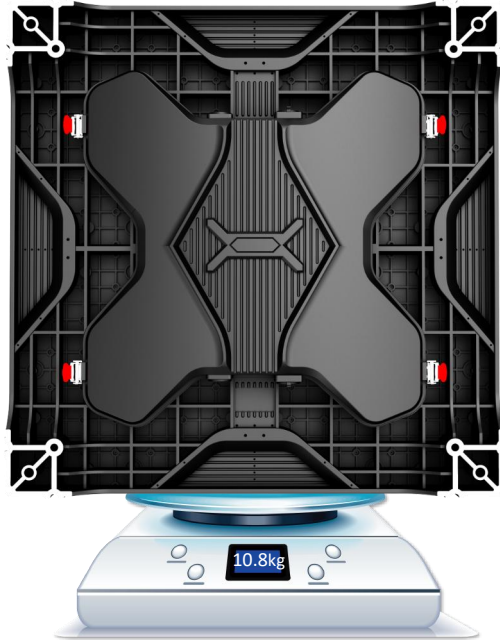

Light weight & thin

Lightweight hollow-out frame design, with a single box weighing only 10.8kg, making it slim, lightweight, and convenient.



Interactive

Equipped with built-in control chip and interactive system, 128/256 sensing points can be selected per square meter. More precise response, more sensitive response, and smooth interactive effect.





Strong Load-bearing



Professional customized high-strength die cast aluminum box with a load-bearing capacity of 2000kg/m², fearless of car crushing.





Express setup

- Set up customized foot pads for laying, accurately correspond to the support angle to achieve horizontal positioning, and quickly assemble.
- Customized adjustable feet with a height range of 15-20mm.

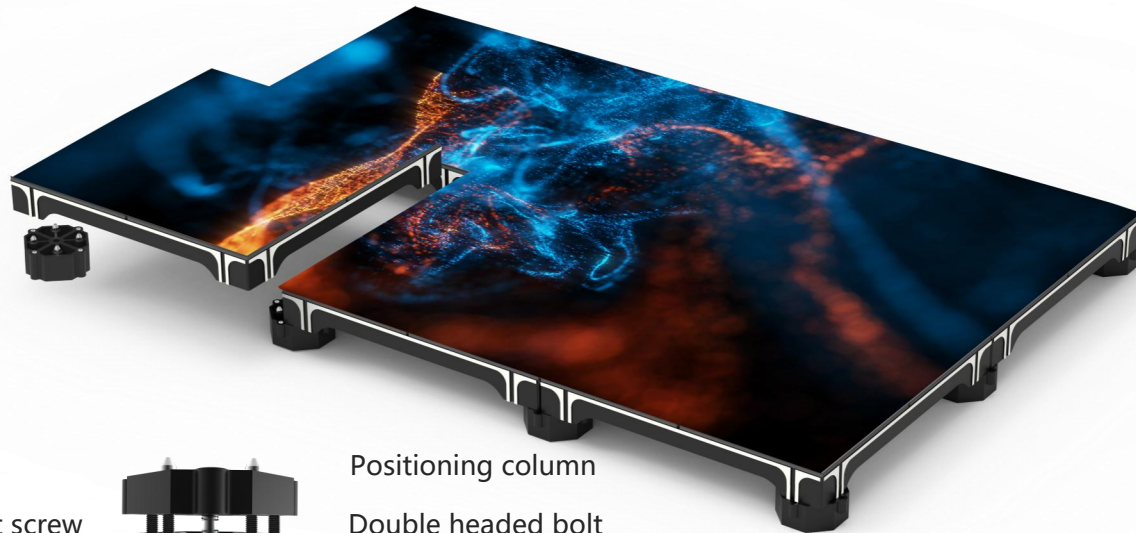

Limit screw




Positioning column

Double headed bolt



Fast Installation

The module adopts a magnetic pre maintenance design to achieve maintenance of the module, power supply, and receiving card, saving time and effort.

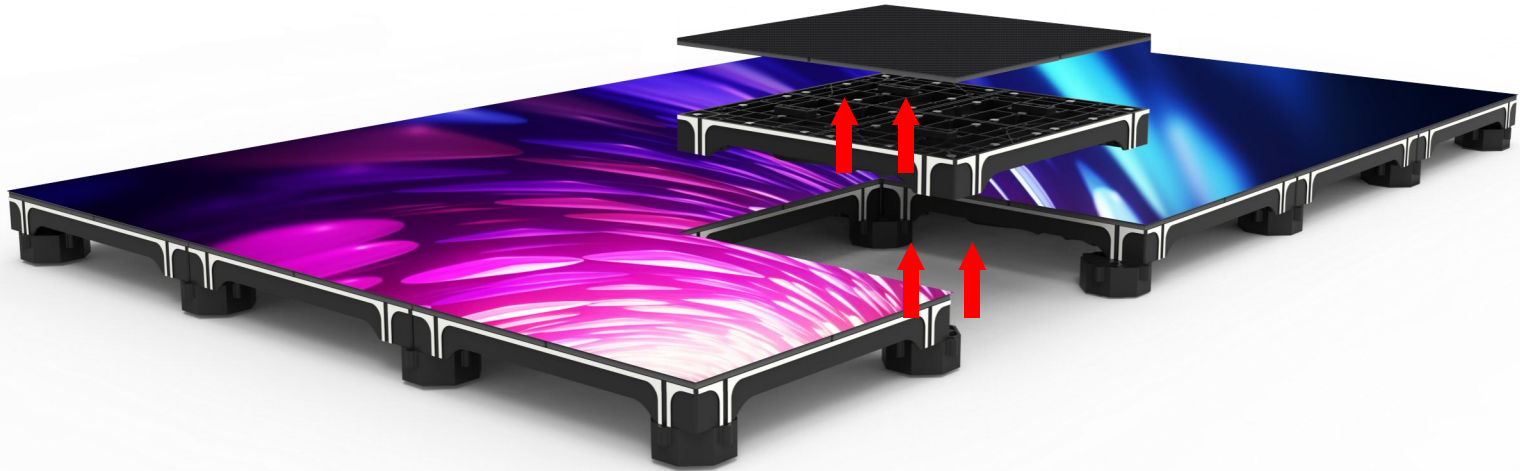



GOB protection

Adopting GOB technology, anti collision, moisture-proof, wear-resistant and easy to clean.






Support customization

We can add edging to the tile screen according to customer requirements to meet personalized needs.



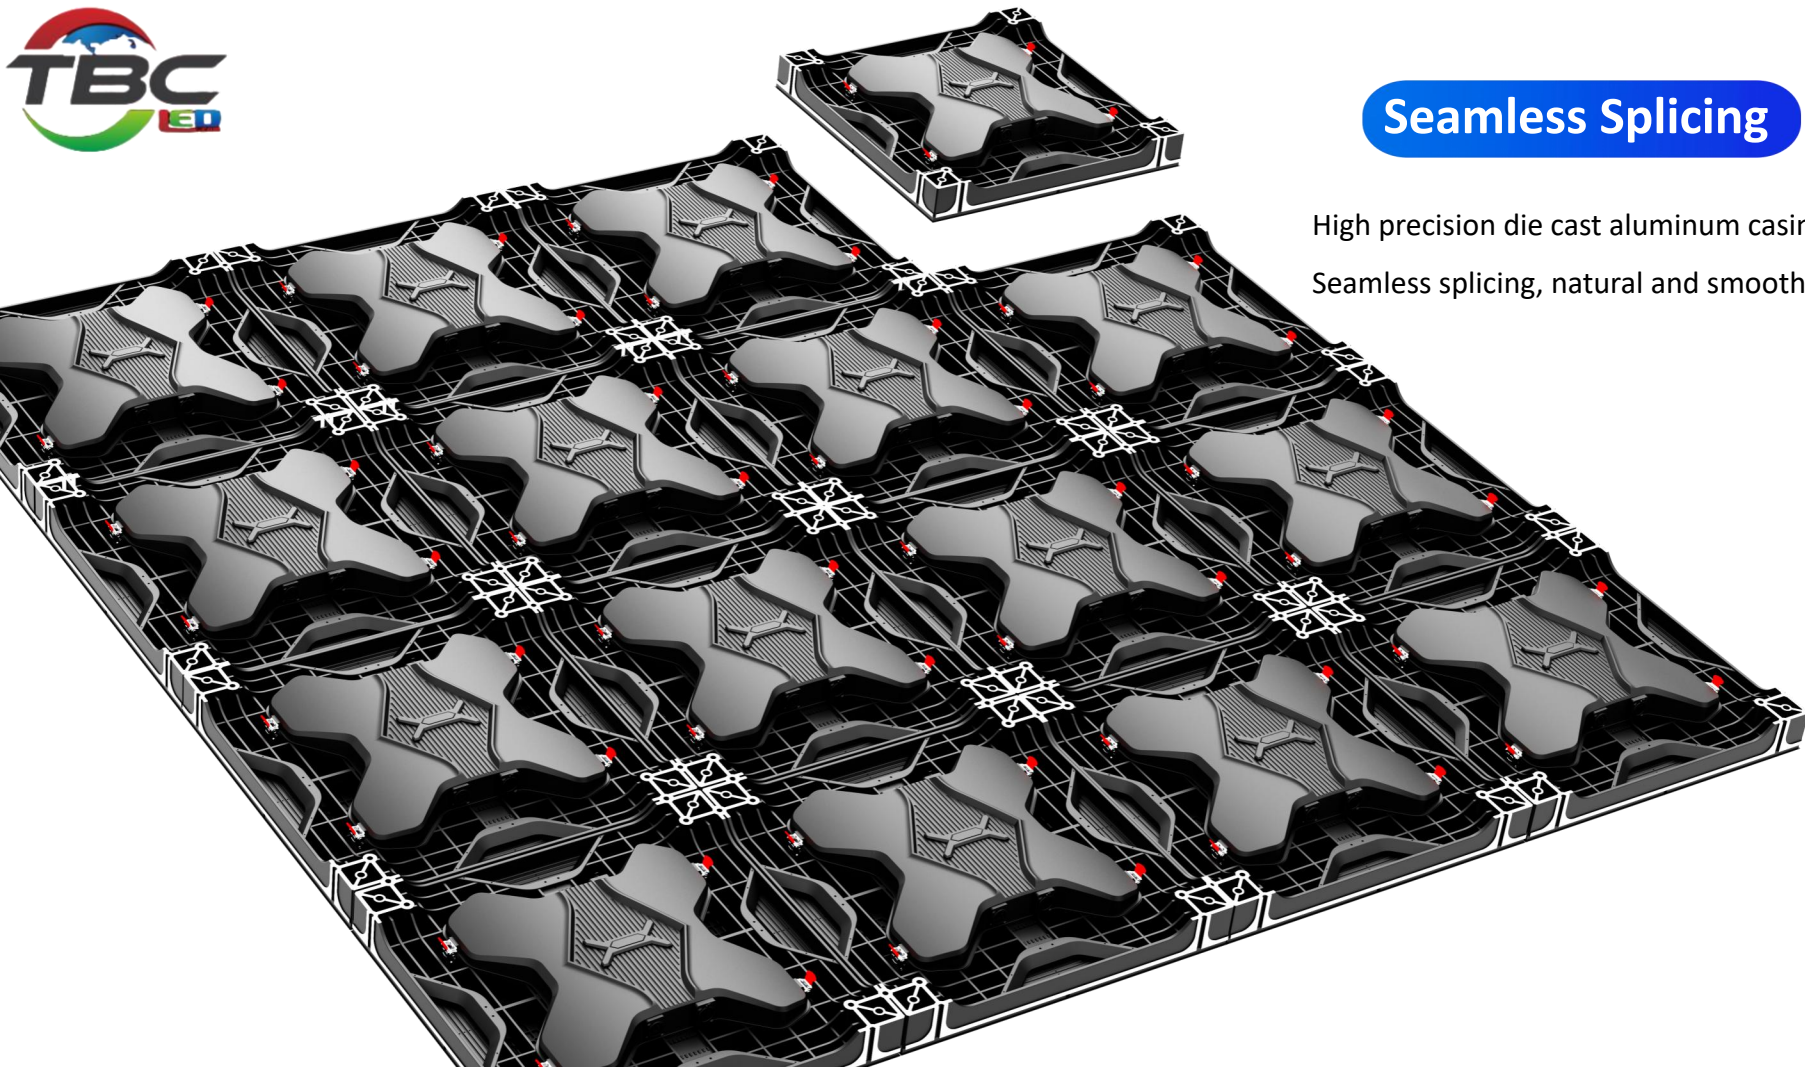

Seamless Splicing


High precision die cast aluminum casing

Seamless splicing, natural and smooth.



Full perspective

On site full perspective viewing ensures that every audience member can enjoy the ultimate visual experience.

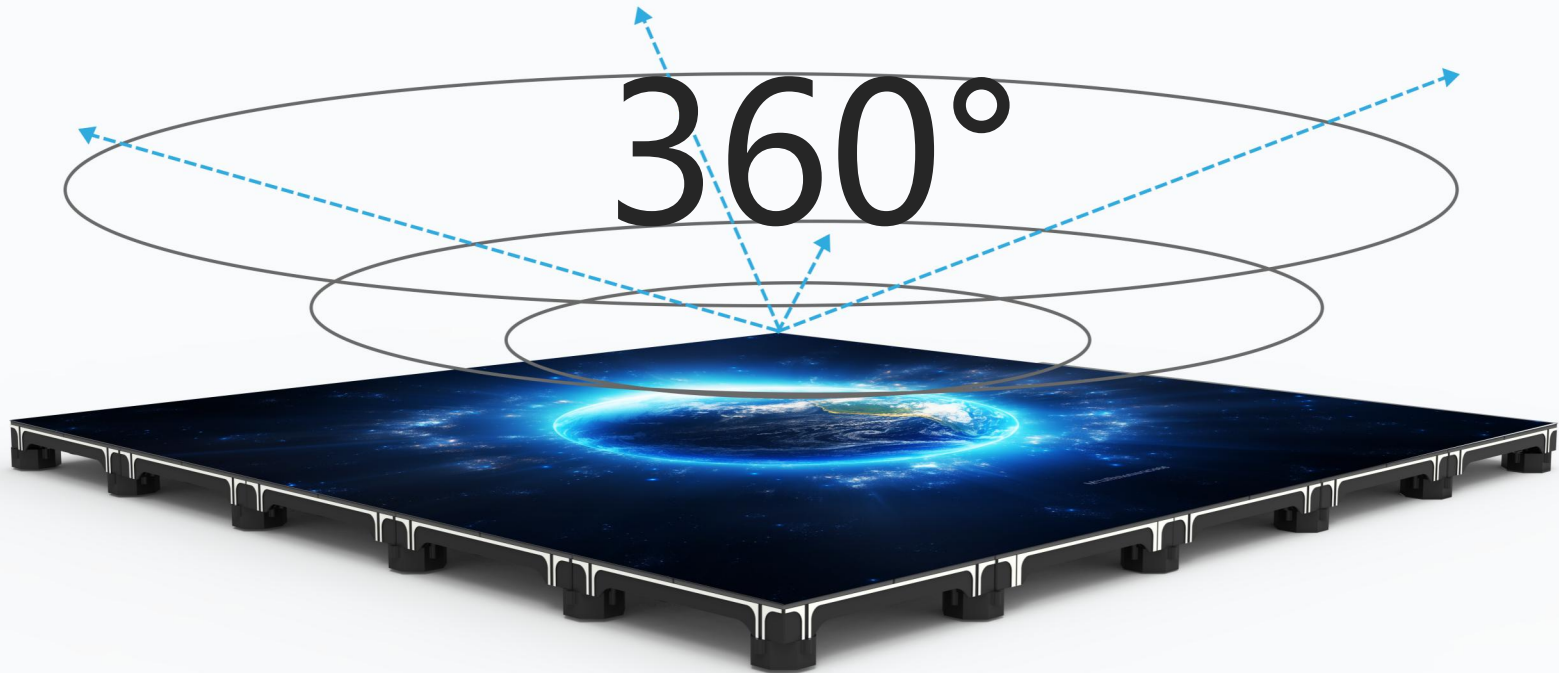



Pixel Pitch	P1.56	P1.9	P2.5	P2.604	P2.976	P3.91
LED Type	MIP0606	SMD1212	SMD1515	SMD1515	SMD1515	
Physical Density(Dot/m²)	409600	262144	160000	147456	112896	SMD2020
Module Resolution	160X160	128X128	100X100	96X96	84X84	65536
Module Size(WXH)	250X250	250X250	250X250	250X250	250X250	64X64
Cabinet Size(mm)	500X500X92	500X500X92	500X500X92	500X500X92	500X500X92	250X250
Cabinet Resoluiton	320X320	256X256	200X200	192X192	168X168	500X500X92
Module Qantity (WXH)	2X2	2X2	2X2	2X2	2X2	128X128
Cabinet Weight(kg)	10.8	10.8	10.8	10.8	10.8	2X2
Maintenance Mode	Front Maintenance	Front Maintenance	Front Maintenance	Front Maintenance	Front Maintenance	10.8
Material	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Front Maintenance
Brightness(Nits)	≥800	≥800	≥800	≥800	≥800	Die-cast Aluminum
Color Temperature(K)	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	≥800
Viewing Angle(V/H)	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°	5000-12000 Optional
Contrast Ratio	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1	160°/160°
Frame Frequency	50/60	50/60	50/60	50/60	50/60	10000 : 1
Drive Mode	1/32 scan	1/32 scan	1/20 scan	1/16 scan	1/14 scan	50/60
Grey Scale	16bit	16bit	16bit	16bit	16bit	1/16 scan
Refresh Rate(Hz)	3840	3840	3840	3840	3840	16bit
Max Power Con.(W/m²)	800	800	800	800	800	3840
Ave Power Con.(W/m²)	200-300	200-300	200-300	200-300	200-300	800
Protection Level	IP31	IP31	IP31	IP31	IP31	200-300
Power Input	AC90-264V,47-63Hz					IP31
Operation T/H(°C/RH)	-20~60°C/10%~85%					
Storate T/H(°C/RH)	-20~60°C/10%~85%					
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC					

Given the continuous iteration and innovation of the products, the parameters are provided solely for preliminary reference purposes, and the actual specifications may be subject to updates.




Application

Showroom



Hotel

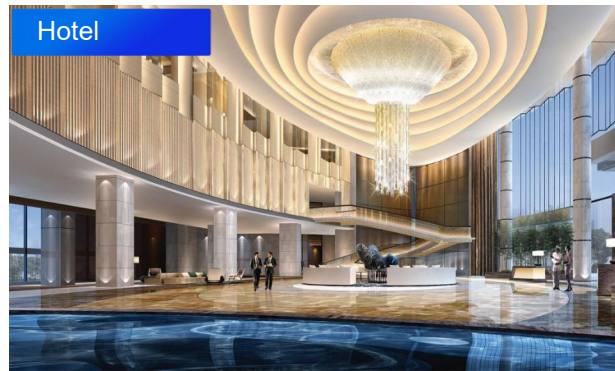

Events



shopping mall



THANKS